



SCAN THIS QR



TO VISIT WEBSITE

## ABOUT US

E.S. INDUSTRIES (ESI) Company, Coimbatore was established in the year 1989. This professional and progressive company is managed by the able and forward thinking of Mr. M. Ramasamy (Proprietor) founder who leads this company more than 30 years.

Mr. RAMASAMY founder and successful developer for the company with his passion and hard work. Ours is one of the best companies and well-known name in the field of construction equipment manufacture in Coimbatore the company markets its products all over South India. E.S. Industries has secured the second place in the market for construction equipment manufacturing. We are the Experts in Designing and Manufacturing of Construction Machineries & Equipments.

We are a widely recognized brand of construction machinery and equipment in Coimbatore. We have over 30 years of manufacturing experience. We design and manufacture machines which are economic, safe, and require minimal maintenance to achieve higher returns for our customers. we have 60 technically well-versed experts working for the company.

Our Product Range Includes Mini Lifts, Concrete Mixer Machines, Block Making Machines, CLC Block Making Plant, Bar Bending and Cutting Machines, Builders Hoist, Wheel Barrows, Vibrator Screed, Power Trowel, Tamping Rammer, Concrete Groove Cutter, Vibrator Needles, Wall Plastering Machine and Other Miscellaneous Construction Machinery & Equipments.

We are leading manufacturer and exporter of quality construction machinery in Coimbatore. E.S. INDUSTRIES is ISO 9001:2015 Certified Company with stringent quality control practices.

## CONCRETE MIXERS WITH LOADING HOPPER



**10/7 CFT HYDRAULIC POWER STEERING**

MODEL NO: HPM107



**10/7 CFT CLUTCH TYPE MIXER**

MODEL NO: CM107



**10/7 CFT HYDRAULIC MIXER**

MODEL NO: HM107

## CONCRETE MIXERS WITHOUT LOADING HOPPER



**10/7CFT CONCRETE MIXER**

MODEL NO: WH107



**7/5CFT CONCRETE MIXER**

MODEL NO: WH75



**5/3.5CFT CONCRETE MIXER**

MODEL NO: WH53

## MULTIMIXER



### MULTIMIXER

MODEL NO: MMM107

7/5 OR 10/7 WITHOUT HOPPER MIXER MACHINE ATTACHED WITH LADDER  
55 FT HEIGHT, 40 MTR 12 MM STEEL ROPE

1/2 TON HOIST 100 FT HEIGHT 100 MTR 12 MM STEEL ROPE

8 / 10 / 12 H.P. HTC OR KIRLOSKAR DIESEL ENGINE

MACHINE MOVABLE WITH AMBASSADOR CAR / JEEP TYRE

SAVE DIESEL, MAN POWER & TRANSPORTATION

EAST TO ERECT & OPERATE

- **DRIVEN MODE** : AIR COOLED DIESEL ENGINE / ELECTRIC MOTOR
- **FEATURE** : HEAVY DUTY CAST IRON AND M.S.CHASIS
- **MOVABLE** : RETREADED PNEUMATIC TYRES



## MINI MIXERS

### DUAL MIXER

MODEL NO.	DM 33.5
POWER	2 HP ELECTRIC MOTOR (PULLEY TYPE)
CAPACITY	3.5/3 CFT HAND / ELECTRIC MIXER MACHINE



### GEAR MIXER

MODEL NO.	GM33.5
POWER	1.5 HP MOTOR ( GEAR TYPE )
CAPACITY	3.5/3 CFT ELECTRIC MIXER MACHINE

### HANDY MIXER

MODEL NO.	HM33.5
POWER	230L / 2HP
CAPACITY	200 LITERS



### CEMENT MIXER

MODEL NO.	CM200
POWER	1 HP 240V/50HZ
CAPACITY	200 LITERS



## MINI LIFT

MODEL NO : ML200

2HP SINGLE PHASE 230V-200 KG / 3HP THREE PHASE 415V-400 KG

8MM STEEL ROPE WITH 30 MTR LENGTH

BRAKE MOTOR & GEAR DRIVE WITH ELECTRIC PANEL

SPEED 25 MTR/MIN



## MONKEY LIFT

MODEL NO : ML200

2HP SINGLE PHASE 230V-200 KG / 3HP THREE PHASE 415V-400 KG

8MM STEEL ROPE WITH 30 MTR LENGTH

BRAKE MOTOR & GEAR DRIVE WITH ELECTRIC PANEL

SPEED 25MTR / MIN

FIXED WINCH SYSTEM

CUSTOMISATION DONE AS PER REQUIREMENT

## PORTABLE LIFT

MODEL NO : PL250

2 HP SINGLE PHASE MOTOR

SINGLE ROPE : 250KG

DOUBLE ROPE : 500 KG

6MM STEEL ROPE WITH 30 MTR LENGTH

SPEED 10-15 MTRS / MIN



### COLUMN BOX CONCRETE LIFT

MODEL NO : CBL200

2 HP THREE PHASE

200 KG CAPACITY

15 MTR HEIGHT

8 MM STEEL ROPE 30 MTR

ELECTRIC BRAKE MOTOR WITH GEAR BOX TYPE



### HALF BAG LADDER LIFT

MODEL NO : HLL300

CONCRETE CONVEYING MACHINE

8HP / 10HP DIESEL ENGINE

300KG CAPACITY

LIFTING HEIGHT 45 MTR

12 MM STEEL ROPE 40 MTR

SPEED 30MTR PER MIN

MOVABLE RETREADED PNEUMATIC TYRES

### ONE BAG LADDER LIFT

MODEL NO : OLL600

CONCRETE CONVEYING MACHINE

8HP / 10HP DIESEL ENGINE

600KG CAPACITY

LIFTING HEIGHT 45 MTR

12 MM STEEL ROPE 40 MTR

SPEED 30MTR PER MIN

MOVABLE RETREADED PNEUMATIC TYRES



### BUILDER HOIST:

MODEL NO : BH 1000

CAPACITY 1 & 0.5 TON BUILDERS HOIST

LIFT FRAME : 65\* 65\* 6 MM ANGLE (SAIL / VIZAG)

10/12 H.P. AIR COOLED HTC / KIRLOSKAR DIESEL ENGINE

7.5 / 10 HP 960 RPM KIRLOSKAR / CROMPTON GREAVES ELECTRIC MOTOR

WIRE ROPE 12 / 14 MM 6 X 36 USHA MARTIN MAKE

SPEED 20/25 MTRS PER MIN

SCAFFOLDING PIPE : CUP LOCK (OR) H FRAME SCAFFOLDING

SIZE 2 MTRS X 2 MTRS




### GOODS ELEVATOR

MODEL NO : GE 1000

0.5 TO 5 TON CAPACITY

AS PER CUSTOMER REQUIREMENT



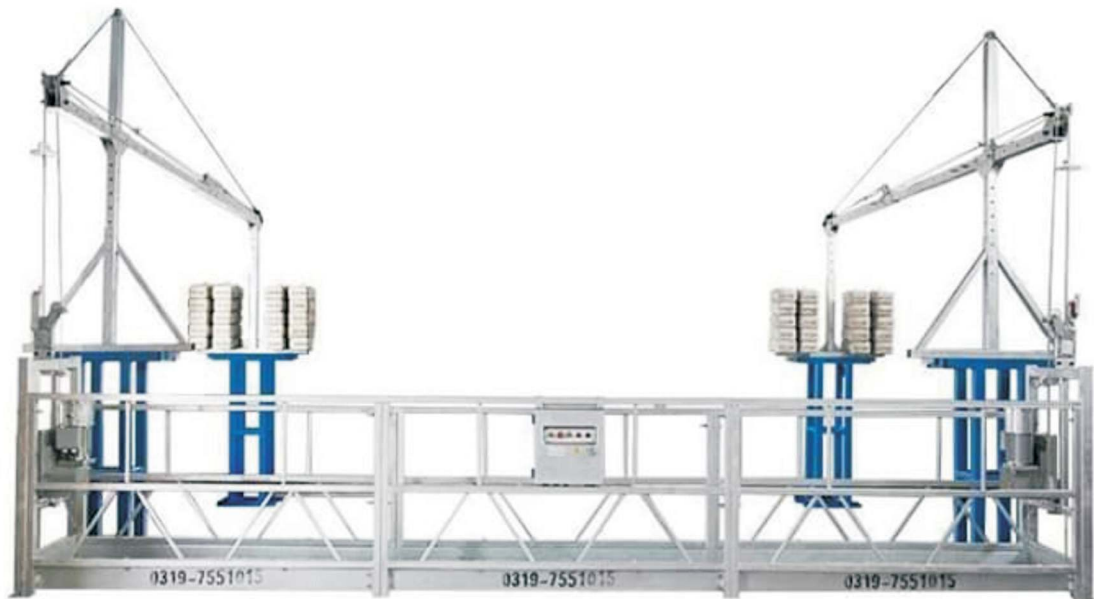

### SUSPENDED PLATFORM HOIST

MATERIAL OF PLATFORM	MILD STEEL PLATFORM & BETA DIP HOT GALVANIZED
RATED LIFTING FORCE	5 KN
PLATFORM SIZE	2.5 METER X 2, 1.5 METER X 1, 1 METER X 1
VOLTAGE	415 V AC
PHASE	3
BRAKING	15 NM
SAFETY LOCK TILT PROOF SAFETY LOCK	2
BALANCE WEIGHT	1000 KGS
RATED LOAD	800 KGS
ASCEND SPEED	9-11 M/MIN
WIRE ROPE	9.1 MM
WIRE ROPE LENGTH	100 M
WIRE ROPE WEIGHT	900 - 950 KG APPROX
COUNTER WEIGHT	1000 KG
HAVELLS ELECTRIC MOTOR POWER	1.8 KW X 2



## CONCRETE BLOCK MAKING MACHINE



**SINGLE VIBRATOR**



**DOUBLE VIBRATOR**



**TRIPLE VIBRATOR**



1060 MODEL	SINGLE VIBRATOR	DOUBLE VIBRATOR	TRIPLE VIBRATOR
Total Power 3 Phase 415V	7.5HP	8.5HP	10HP
Hydraulic Motor	5 HP1440 rpm	5 HP1440 rpm	5 HP1440 rpm
Vibrator Mould Motor	2 HP 2880rpm	3 HP 2880rpm	3 HP 2880rpm
Vibrator Ram Motor	NIL	NIL	1.5HP 2880rpm
Travel Motor	0.5 HP 1440 rpm	0.5 HP 1440 rpm	0.5 HP 1440 rpm
Weight(appx)	1300 kg	1450 kg	1600 kg
Operating Pressure	140 kg/cm <sup>3</sup>	140 kg/cm <sup>3</sup>	140 kg/cm <sup>3</sup>
Moulding Area	1060*600 mm	1060*600 mm	1060*600 mm
Dimensions	1750*1475*1750mm	1750*1475*1750mm	1750*1475*1750mm
Production Capacity 50-60 Stroke/hour	400*200*100mm (4") 10Blocks /Stroke	400*200*100mm (4") 10Blocks /Stroke	400*200*100mm (4") 10Blocks /Stroke
	400*200*150mm (6") 6 Blocks/stroke	400*200*150mm (6") 6 Blocks/stroke	400*200*150mm (6") 6 Blocks/stroke
	400*200*200mm (8") 5 Blocks/Stroke	400*200*200mm (8") 5 Blocks/Stroke	400*200*200mm (8") 5 Blocks/Stroke

## TILE MIXER & VIBRO MIXER TABLE

Tile Mixture



Vibro Forming Table



Rubber Moulds



Designer Tiles



### SINGLE DRUM VIBRATORY ROLLER

MODEL	VRS
WEIGHT	330KG
TRAVEL SPEED	0-4KM/H
STARTING METHOD	MANUAL
DRIVE MODE	HYDAULIC MODE
WALKING MODE	FORWARD & BACKWARD
ROLLER SIZE	600*426MM
ENGINE TYPE	HONDA GX160
CAPACITY	2 TONS



### DOUBLE DRUM VIBRATORY ROLLER

MODEL	VRD
WEIGHT	550KG
TRAVEL SPEED	0-4KM/H
STARTING METHOD	MANUAL/ELECTRIC STARTING
DRIVE MODE	HYDAULIC MODE
WALKING MODE	FORWARD & BACKWARD
ROLLER SIZE	600*426MM
ENGINE TYPE	HONDA / GREAVES
CAPACITY	3 TONS

### EARTH RAMMER

MODEL	ERG5
CAPACITY	2 TO 5 TONS
POWER	5 HP
PLATE THICKNESS	16MM



### REVERSIBLE PLATE COMPACTOR

MODEL	RPC160
WEIGHT	160KG
PLATE SIZE	L650*W370
ENGINE	HONDA GX160 AIR COOLED



## TAMPING RAMMER

ENGINE TYPE		MOTOR TYPE	
MODEL	TRE90	MODEL	TRM 100
JUMPING HEIGHT	40-70 MM	JUMPING HEIGHT	45-70 MM
FORWARD SPEED	0-25M/MIN	FORWARD SPEED	8-10M/MIN
MATERIAL	ALUMINUM	MATERIAL:	ALUMINUM
POWER	5.5 HP	POWER	3KW
ENGINE	HONDA GX160 AIR COOLED		



## EDGE TROWEL

MODEL	ET60
WORKING DIAMETER	600MM
ENGINE TYPE	HONDA GX160 AIR COOLED
POWER	5.5HP
BLADE QUANTITY	4PCS



## POWER TROWEL

MODEL	PT94
WORKING DIAMETER	1 M
ENGINE TYPE	HONDA GX160
POWER	5.5HP
BLADE QUANTITY	4PCS




## BULL FLOAT

MODEL	BF12
DIMENSIONS SIZE	L 3000*W 200*H 2.8
MATERIAL OF BLADE	ALUMINUM ALLOY
HANDLE LENGTH	3*1.8M
MATERIAL OF HANDLE	STAINLESS STEEL

### RIDE ON TROWEL

MODEL	RT338
WEIGHT	338KG
WORKING DIAMETER	L1890*W915*H1500
ENGINE TYPE	HONDA GX690
POWER	24HP
SPEED	120-140 RPM

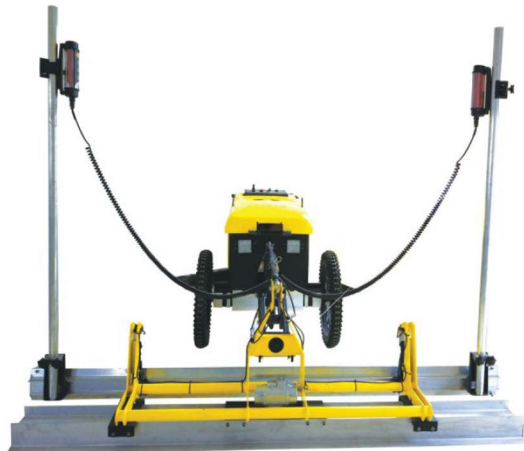

### LASER SCREED

MODEL	LS325
DIMENSION	L 2748 * W 2900 * H 2044
POWER SUPPLY	2.6 KW SINGLE CYLINDER
	4 STROKE GASOLINE ENGINE EC2500CX
ELECTRO SERVO	ELECTRIC SERVO SYSTEM
TIRE	733MM ATV / 3.0 - 21 NARROW TIRE
WHOLE FLAT WIDTH	2.6

### VIBRATOR SCREED

MODEL	VS25
BLADE SIZE	2-6 M
DRIVE SYSTEM	FLEXIBLE SHAFT
ENGINE TYPE	HONDA GX35 AIR COOLED
MAX.SPEED	5200 RPM



## CONCRETE VIBRATOR PAVER



### CONCRETE VIBRATOR PAVER

MODEL	FVP 219
WORKING WIDTH	3-8 MM
MAX INSERT VIBRATOR DEPTH	300MM
TRAVEL SPEED	4 - 8M / MIN
DIA OF ROLLER	219 MM
QUANTITY OF ROLLER	2 ROLLER AND 1 AUGER
VIBRATOR ROTATION RATE	300 RPM
VIBRATORS DETAIL	50 MM
CONCRETE VIBRATOR DISTANCE	50 CM
MATERIAL OF MACHINE BODY	IRON
VOLTAGE / FREQUENCY	380 V / 50 HZ
VIBRATOR MOTOR SPEED	1.5 KW
LIITING MOTOR POWER	3 KW
TRAVELING MOTOR POWER	4 KW
AUGER MOTOR	4 KW



## VIBRATOR



### HONDA VIBRATOR

MODEL	GX80 / GX100
POWER	1.03KW/3600 RPM
FUEL	PETROL/KEROSENE
NEEDLE LENGTH	6METER FLEXIBLE HOSE
NEEDLE DIAMETER	25MM/40MM/60MM

### GREAVES VIBRATOR

MODEL	MK 12/2
POWER	1.1KW/3000 RPM
FUEL	PETROL/KEROSENE
NEEDLE LENGTH	6METER FLEXIBLE HOSE
NEEDLE DIAMETER	25MM/40MM/60MM



### MOTOR VIBRATOR

MODEL	MV1
POWER	2HP/3000 RPM
VOLTS	230/415
NEEDLE LENGTH	6METER FLEXIBLE HOSE
NEEDLE DIAMETER	25MM/40MM/60MM

### PORTABLE VIBRATOR

MODEL	PV1
POWER	800V/1300V
NEEDLE LENGTH	1.5/2/3METER FLEXIBLE HOSE
NEEDLE DIAMETER	35MM



## TMT STEEL BAR BENDER



### TMT BAR BENDING MACHINE

MODEL	BB45D
INPUT VOLTAGE	415V
POWER INPUT	3KW
WORKING SPEED	12R/MIN (HIGH SPEED)
OVERALL DIMENSION	860*820*910MM
WEIGHT	380KG
OPERATING TYPE	AUTOMATIC (BRAKE MOTOR)

MODEL	BB40D
INPUT VOLTAGE	415V
POWER INPUT	3KW
WORKING SPEED	10R/MIN (HIGH SPEED)
OVERALL DIMENSION	850*800*730MM
WEIGHT	320KG
OPERATING TYPE	AUTOMATIC (BRAKE MOTOR)



## TMT STEEL BAR CUTTER



### TMT STEEL BAR CUTTER

MODEL	BC50
INPUT VOLTAGE	415V
POWER	4KW
WORKING SPEED	30 TIMES/MIN
OVERALL DIMENSION	1280*480*720MM
WEIGHT	500KG

MODEL	BC40
INPUT VOLTAGE	415V
POWER	3KW
WORKING SPEED	32 TIMES/MIN
OVERALL DIMENSION	1190*450*680MM
WEIGHT	485KG

### SCRAP BAR STRAIGHTENING MACHINE

MODEL	SBS 4-12/SBS 6-14
STRAIGHTENING DIAMETER	4-12/14MM
SPEED	28M/MIN
CUTTING SPACE	500-6000MM
MOTOR POWER	(4+2.2/5.5+2.2) KW
WEIGHT	400/720 KG

## WIRE STRAIGHTENING & CUTTING MACHINE



GTQ4-12A



GTQ4-14A



### WIRE STRAIGHTENING & CUTTING MACHINE

MODEL	WSCM4-12	WSCM4-14A
STRAIGHTING DIAMETER	4-12MM	4-14MM
STRAIGHTING WHEELS	6-8PICS	8 PICS
SPEED OF WORKING	25-35M/MIN	35-42M/MIN
CUTTING SPACE	900MM	900MM
MOTOR POWER	9KW	19KW
WEIGHT	650KGS	920KGS



## CNC WIRE STIRRUP BENDER



PARAMETER	WORKING CAPACITY
SINGLE ROUND WIRE DIAMETER	Φ 4 – 13 MM
DOUBLE ROUND WIRE DIAMETER	Φ 4 – 10 MM
SINGLE RIBBED WIRE DIAMETER	Φ 4 – 12 MM
DOUBLE RIBBED WIRE DIAMETER	Φ 4 – 10 MM
MAX. BENDING ANGLE	180°
CENTEAL MANDREL DIAMETER	Φ 20 – 30 MM
MAX. PULLING SPEED	110M / MIN
MAX. BENDING SPEED	1840 PICS / H

PARAMETER	RELATED POWER
2 SERVO MOTOR	8KW = 7.5 KW
1 BREAK MOTOR	4 KW
1 MOTER FOR AIR PUMP	4 KW
VOLTAGE	380 V / 415 V
AVERAGE ELECTIC POWER CONSUMPTION	5KW / H
WORKING ENVIRONMENT TEMPERATURE	-5 ~ 40
OVERALL SIZE	350 X 1000 X 2150 MM
GROSS WEIGHT	2.25 T

## STEEL BAR THREADING MACHINE

MODEL	SBTM40
SUITABLE BAR DIAMETER	16-40MM
THREAD PITCH	1.75,2.0,2.5,3.0
MOTOR	3KW
MAX ROLLING LENGTH	100MM
THREAD ANGLE	70* OR 60*,HELIX ANGLE



## PORTABLE REBAR CUTTER

MODEL	PRC-16	PRC-20	PRC-25
VOLTAGE	220V/110V	220V/110V	220V/110V
WATTAGE	850/900W	950/1350W	1600/1700W
GROSS WEIGHT	13 KG	18.3 KG	32KG
MACHINE WEIGHT	8 KG	13 KG	24.5 KG
BENDING SPEED	2.5-3 S	3.0 -3.5 S	5 S
MAX BENDING	16MM	20MM	25MM
MIN BENDING	4MM	4MM	4MM
CARTON SIZE	510*230*150	480*195*280	565*230*345
MACHINE SIZE	460*270*115	410*115*220	480*150*255

## PORTABLE REBAR TYING

MODEL	PRT-25L	PRT-40L
BATTERY	DC14,4V4.0AH	DC14,4V4.0AH
SIZE	25MM	40MM
MACHINE WEIGHT	2.25 KG	2.25 KG
TURNS PER TIE	2/3 TURNS	2/3 TURNS
LENGTH	430MM/2WRAPS	600MM/2WRAPS
TIES PER COIL	230 TIES/2TURNS   170 TIES/3TURNS	160 TIES/2TURNS   128 TIES/3TURNS
DIAMETER OF WIRE	0.8 MM	0.8 MM
CARTON SIZE	515*415*150MM	515*415*150MM
MACHINE SIZE	285*296*100MM	285*296*100MM
ACCESSORIES	2 PCS OF LI-ION BATTERY,1 PC OF CHARGER,4PCS OF WIREVOILS, 1PC OF CARRYING CASE	2 PCS OF LI-ION BATTERY,1 PC OF CHARGER,4PCS OF WIREVOILS, 1PC OF CARRYING CASE





### CONCRETE CUTTER

MODEL	CC18
WEIGHT	154KG
CUTTING WIDTH	5-8MM
CUTTING DEPTH	180MM
ENGINE TYPE	HONDA GX390
POWER	13HP
DEPTH ADJUSTMENT	HANDLE ROTATION

### CUT OFF MACHINE

MODEL	COM01
POWER	2200W
BLADE SIZE	14 INCH
SPEED	3800RPM



### DEMOLITION HAMMER

MODEL	DM120
POWER	900W
MATERIAL	METAL, PLASTIC
WEIGHT	5.4KG



## SAND SIEVER

### ROTATING SAND SIEVER

MODEL	RSS 1
LENGTH	4FEET LENGTH ROTATING TYPE
OPERATION	MANUAL & ELECTRIC MOTOR
MESH SIZE	18G – 1*4 OR 1*6 OR 1*10 OR 1*12



### VIBRATING SAND SIEVER

MODEL	VSS 1
POWER	2HP ELECTRIC MOTOR
MESH SIZE	18G
LOADING	MANUAL LOADING

### CONCRETE SLAB TROLLEY

MODEL	CSS 1
CAPACITY	7CFT
WHEEL TYPE	CASTING



### WEIGH BATCHER

MODEL	WB 1
CAPACITY	210+210 KG
MEASURING TYPE	SCALE/DIGITAL
WHEEL TYPE	CASTING
HOPPER	DUAL



### EARTH AUGER

MODEL	EA05
DISPLACEMENT	68CC
ENGINE TYPE	SINGLE CYLINDER, TWO STROKE
OUTPUT POWER	2.2KW
FUEL / OIL MIXTURE RATION	25:1
DRILLER DIAMETER	100/150/200/300MM

### BRUSH CUTTER

MODEL	BC52
DISPLACEMENT	45CC / 52CC
ENGINE TYPE	2/4 STROKE ENGINE




### MINI HOIST

MODEL	PA1000
ROPE THICKNESS	6MM
LIFTING SPEED	10M/MIN
LIFTING HEIGHT	18M / 9M
LIFTING CAPACITY	250/500KG

## H2O BEAM

### Descriptions:

- Raw Material: Pine LVL For Flange, Poplar Plywood For Web.
- Glue: 100%WBP Phenolic Glue
- Density: 5.0-6.0kg/M
- Size: Flange: 40MM\*80MM\*Length  
Web: 27MM\*150MM\*Length  
Height: 200MM
- Water Content: 5-12%
- Length: 1-12M (Asia Record)
- Painting: Yellow Waterproof Painting  
Or As Per Request
- Usage: Formwork




## PROJECT APPLICATION






## SCAFFOLDING FRAME SYSTEM

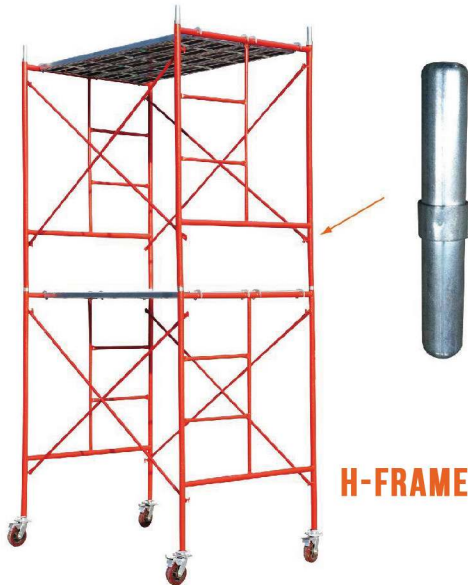

**H-FRAME**



**A-FRAME**

**CONNET PIN**


**CROSS BRACE**

CODE	SIZE (W)	MAIN PIPE	WEIGHT (KG)
LDS M01-35-255	L:225	φ 35X1.5, φ 42X2	0.33
		φ 35X1.5, φ 42X2.2	0.40



CODE	SIZE (W)	MAIN PIPE	WEIGHT (KG)
LDS F01-120-180	1219 (4') X 1829 (6')	φ 21.3X1.4	3.10
		φ 25.4X1.5	3.95




## HOT DIP GALVANIZING POLE

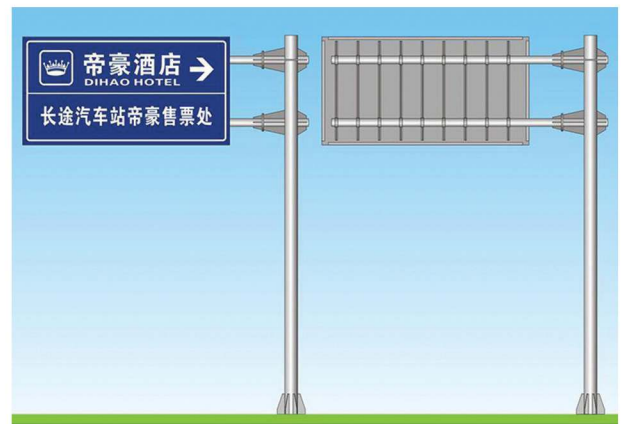**\*AS PER CUSTOMER REQUIREMENT**

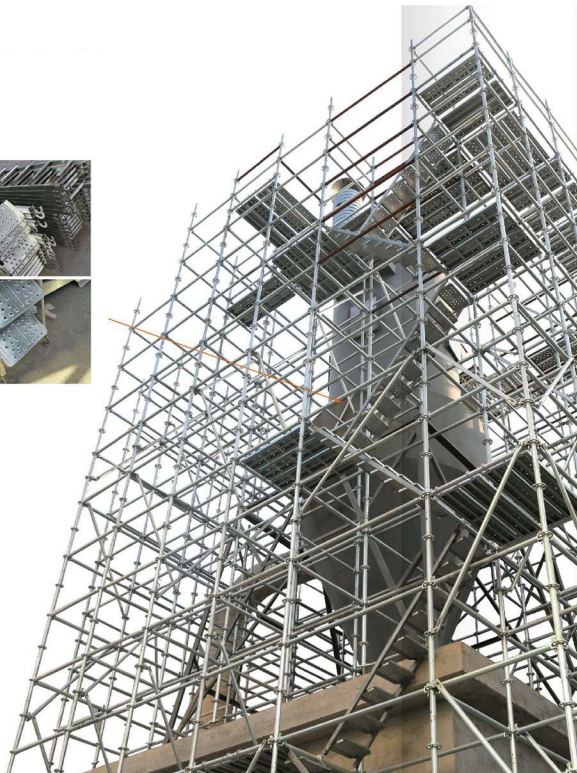

## SCAFFOLDING LADDER

 Ladder Hook  
  
 Ladder Step  

Code	Size(WxH)	Main Pipe	Weight(kg)
LDS J01-1825x1955	1825x1955mm	Φ30x50x1.7, ±1.5	25.57
LDS J01-1800x2000	1800x2000mm	Φ30x50x1.7, ±1.5	24.54
LDS J01-1800x1500	1800x1500mm	Φ30x50x1.7, ±1.5	20.26
LDS J02-2000x2000	2000x2000mm	Φ30x50x1.7, ±1.5	26.50

## FILM FACED PLYWOOD

LANDISI WOOD is the plywood product that is laminated by an impregnated film of plain phenolic resin manufactured to many kinds of size and thickness to meet the strict requirements of international standards.



THICKNESS	NO OF PLYS	SIZE	GLUE TYPE	SPECIES
9 MM	5	220 X 2440 MM (4' X 8')	WBP & MELANMINE - UREA GLUE (TYPE 1.5)	TROPICAL HARDWOOD
12 MM	5			
12 MM	7			
15 MM	9			
18 MM	9			
18 MM	13			
21 MM	11			
24 MM	13			
27 MM	13 / 15			
30 MM	13 / 17			





### COUPLER

SWIVEL COUPLER: PRESSED, FORGED

FOXED COUPLER: PRESSED, FORGED

GO GO CLAMP



### SCAFFOLDING

SIZE: 2\*1 METER

UFM

SLM



### COLUMN FORM

THICKNESS: 14G

AS PER CUSTOMER REQUIREMENT

### FLOOR FORMS CENTRING SHEET

THICKNESS: 14G

SIZE: 1150MM\*600MM (1 1/2')

SIZE: 900MM\*600MM (1 1/4")

SIZE: 900MM\*600MM (1")

SIZE: 900MM\*600MM (1 1/2")

### ADJUSTABLE FLOOR FORMS

THICKNESS: 14G

SIZE: 900MM\*450MM

SIZE: 900MM\*300MM

SIZE: 1150MM\*300MM

SIZE: 1150MM\*450MM



### ADJUSTOR SPAN

SIZE: 2.5M TO 4.15 M

SIZE: 3.1M TO 5 M

SIZE: 3.1 TO 5.5 M



### ADJUSTOR PROPS

2M TO 3.75M

3M TO 4.65M

3M TO 5.65M




## TESTING ITEMS



**CUBE MOULD**

150MM\*150MM

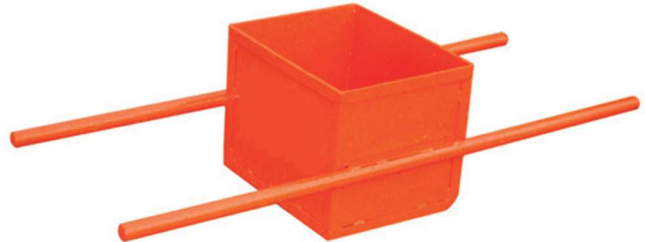

**MEASURING BOX**

CAPACITY: 1.25 CFT

SIZE: 1\*1



**SLUMP CONE**

MATERIAL: CAST IRON

PRODUCT DIMENSIONS (L X W X H) : 38 CM X 38 CM X 42 CM

WEIGHT : 3.2 KILOGRAMS

**CUBE TESTING MACHINE**

MATERIAL: MILD STEEL

CAPACITY: 120 TON

SURFACE FINISH: COLOR COATED

VOLTAGE: 220 V

MOTOR POWER: 1-2 HP



## WHEEL BARROWS



**W1**



**W2**



**W3**



**W4**



**W5**



**W6**



**W7**

CONSTRUCTED WITH 14/16G SHEET

SCOOTER TYRE OR AUTO TYRE WHEEL

CAPACITY: 4CFT/3.5CFT/3CFT/2.5CFT



### PLATFORM WHEEL BARROW

ALL TYPES OF PLATFORM WHEEL BARROW

# E.S. INDUSTRIES


**Mrfs : All Construction Equipments**

51/2, Avinashi Road, R.G. Pudur, Chinnampalayam Post,  
Coimbatore - 641 062. Tamilnadu, India.

**Web :** [www.esimix.com](http://www.esimix.com) | **Email :** [esimix@ymail.com](mailto:esimix@ymail.com)

PHONE:	SALES:	SERVICE:
0422-2627354	+91 9443328354	+91 9500917354
0422-2628354	+91 9655328354	+91 9842217354

**Our Dealer Location :**  
**CHENNAI | BANGALORE | VIJAYAWADA | KERALA.**

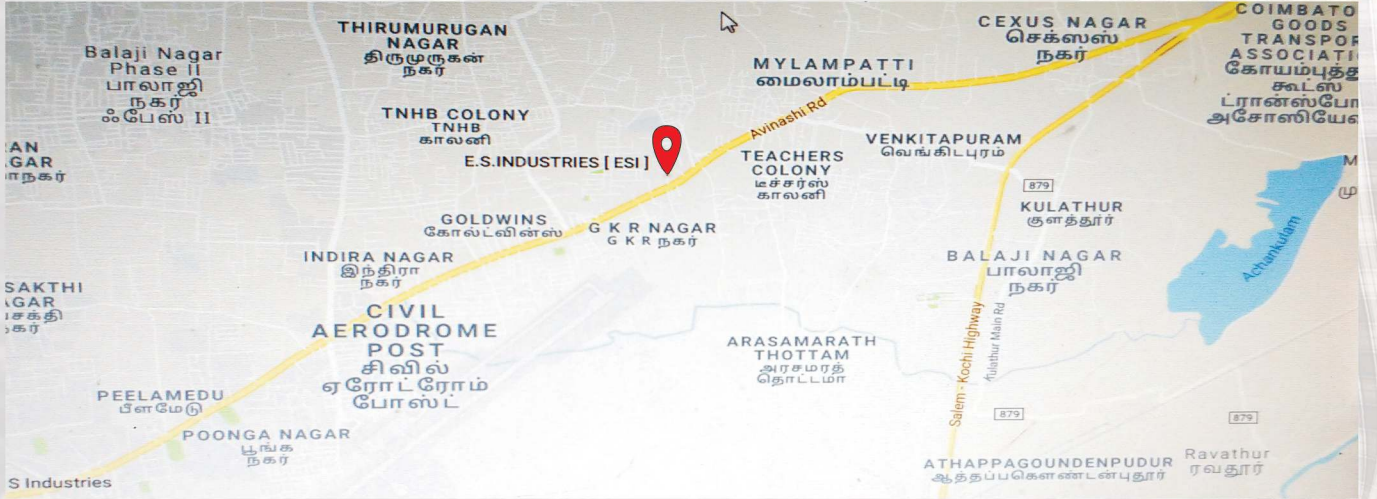

## DEALS WITH BRAND



ETC...